

LONKING 龙工

Efficiency Rules the Future

CDM6035 MINI EXCAVATOR

**LONKING (FU JIAN) INTERNATIONAL TRADE CO.,LTD.**

Add: 26 Minyi Road,Xinqiao,Songjiang Industrial Zone,Shanghai

E-mail: export@lonking.cn <http://www.lonkinggroup.com>

Tel: +86-21-3760 2242

- OPERATING WEIGHT: 3850kg
- ENGINE POWER: 18.2kW
- BUCKET CAPACITY: 0.11m³
- TRAVEL SPEED: 2.3/4.0km/h





Acerca de Lonking

Noticias

Productos

Soporte de servicio

Relaciones con inversores

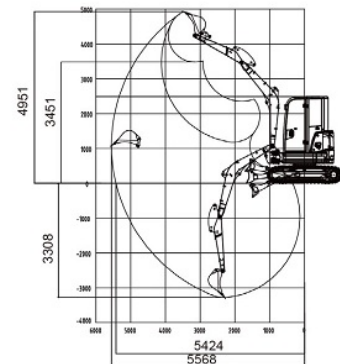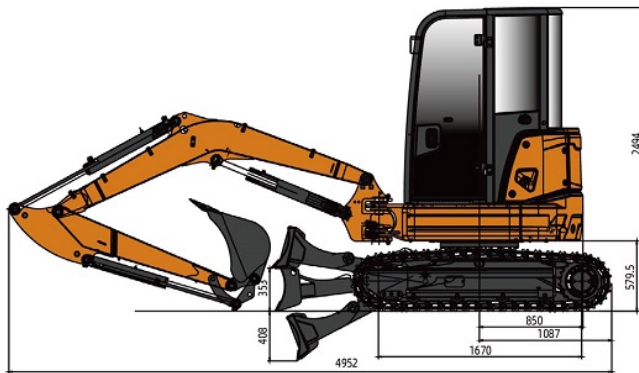

TECHNICAL PARAMETERS

	Name	Data
Basic	Operating weight	3850 kg
	Standard bucket Capacity	0.11 m ³
	Standard bucket Width	520 mm
	Max.Travel speed	2.3/4.0 km/h
	Max.Swing speed	9.5 rpm
	Grade ability	30°
	Ground pressure	34 kPa
	Max.Traction force	27.4 kN
	Boom swing angle (L/R)	72°/44°
Engine	Engine brand	KUBOTA
	Engine model	D1703
	Rated power	18.2 kW/2200 rpm
	Displacement	1.647 L
	Fuel tank	40 L
Hydraulic	Max.Flow(total)	88 L/min
	Max.Working pressure	24.5 MPa
	Max.Pilot pressure	3.2 Mpa
	Max.Arm digging force	18(19.8) kN
	Max.Bucket digging force	31.8 kN
	Hrdraulic oil tank	41 L
Chassis	Track width	300 mm
	Track type	Rubber crawler
	Carrier rollers number	1(each side)
	Track rollers number	4(each side)
Electric	System voltage	12 V
	Battery capacity	12 V,45 Ah

PRODUCT FEATURES

- Kubota Strong Power Engine.Emission level reaches USA T4F and EU Stage V.
- The combination of zero-tail swing and boom deviation is designed for narrow and complicated working scenarios.
- Wider space and view are provide by enlarged front windscreen and sunroof.
- Touch panel monitor, electronic throttle rotating control and auto idling functions
- The tail and right hoods can be opened completely to ensure easy and convenient maintenance.

STANDARD EQUIPMENT

- Fops/Tops cabin
- Suspension seat
- Air conditioning
- Hydraulic pilot control rod
- Deflectable boom
- Warning light
- Breaker pipeline

OPTIONAL EQUIPMENT

- Boom & arm safety valve
- Dozer blade safety valve
- Fops/Tops canopy
- 300mm width bucket
- 1200mm width bucket
- Steel tracks

The following blank can be used for notes or comments

For more information on Lonking products,Please contact our local agent;